

Technical Manual

JBL2123H/J

SPECIFICATIONS



ACOUSTIC & ELECTRICAL SPECIFICATIONS:

- Nominal Impedance: 8 ohm (H) / 16 ohm (J)
- Power Capacity: 200W Continuous Pink Noise
- Frequency Range: 80 Hz – 6 kHz (–10dB)
- Sensitivity: 100 dB SPL*
- Crossover Frequency: 3 kHz

SYSTEM COMPONENTS:

- Cabinet: N/A
- Grille: N/A
- Mid Range Transducer: 250mm (10 in.) Cone Transducer
- DC Resistance: 4.2 ohm ±10% Aluminum Wire (H)
8.7 ohm ±10% Aluminum Wire (J)

AURAL SWEEP TEST SPECIFICATIONS:

- A. L.F. Aural Sweep Test: 6.0V Input, 20 Hz to 1.2 kHz

PHYSICAL SPECIFICATIONS:

- Enclosure Dimensions: 261mm x 261mm x 111mm D
(10.25 x 10.25 x 4.375 in. D)
- Shipping Weight: 13 lbs. (5.9 kg)


WARRANTY INFORMATION:

- Refer to the Warranty Statement packed with each product.


*1 Watt (2.83 V RMS) @ 1 Meter (H)

*1 Watt (4.0 V RMS) @ 1 Meter (J)

PACKAGE

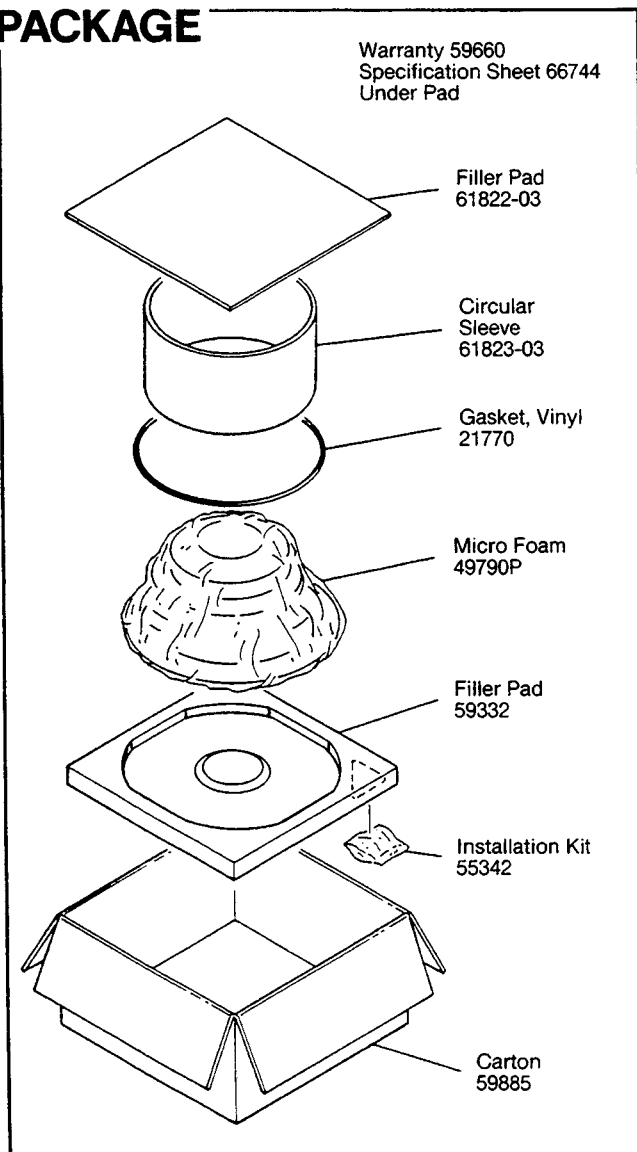

COMPONENT VIEW

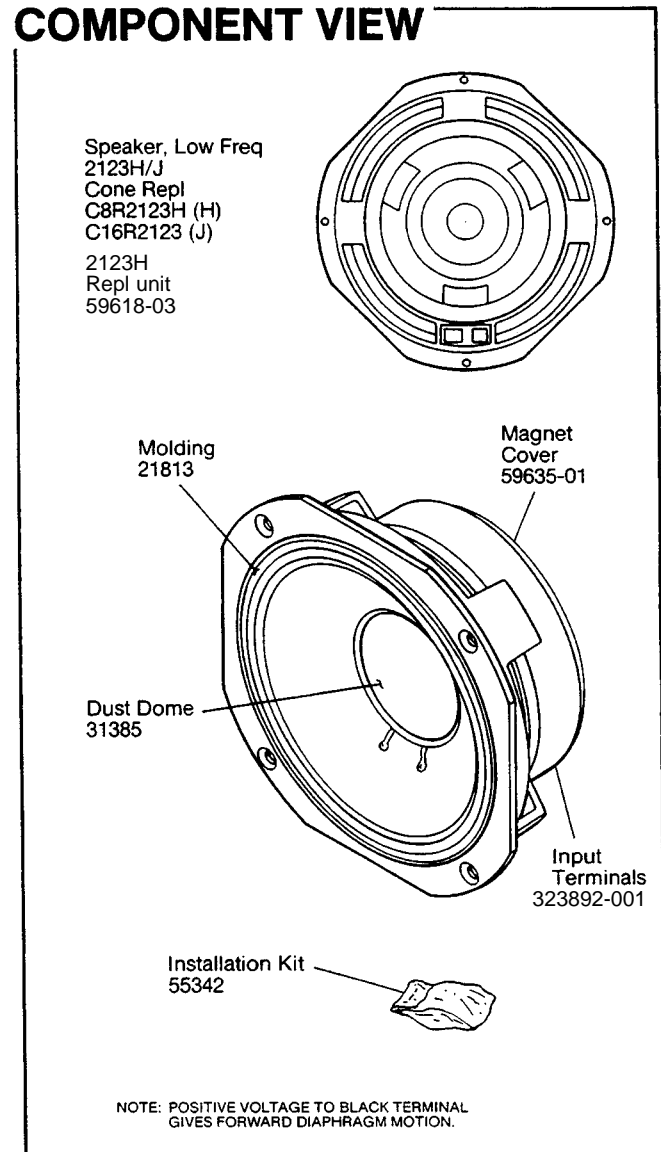


JBL2123H/J REV D

JBL2123H/J

MECHANICAL DRAWING

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF JBL AND UNREPRODUCIBLE. THEY ARE ISSUED IN STRICT CONFIDENCE AND SHALL NOT BE REPRODUCED, COPIED, OR USED AS THE BASIS FOR MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

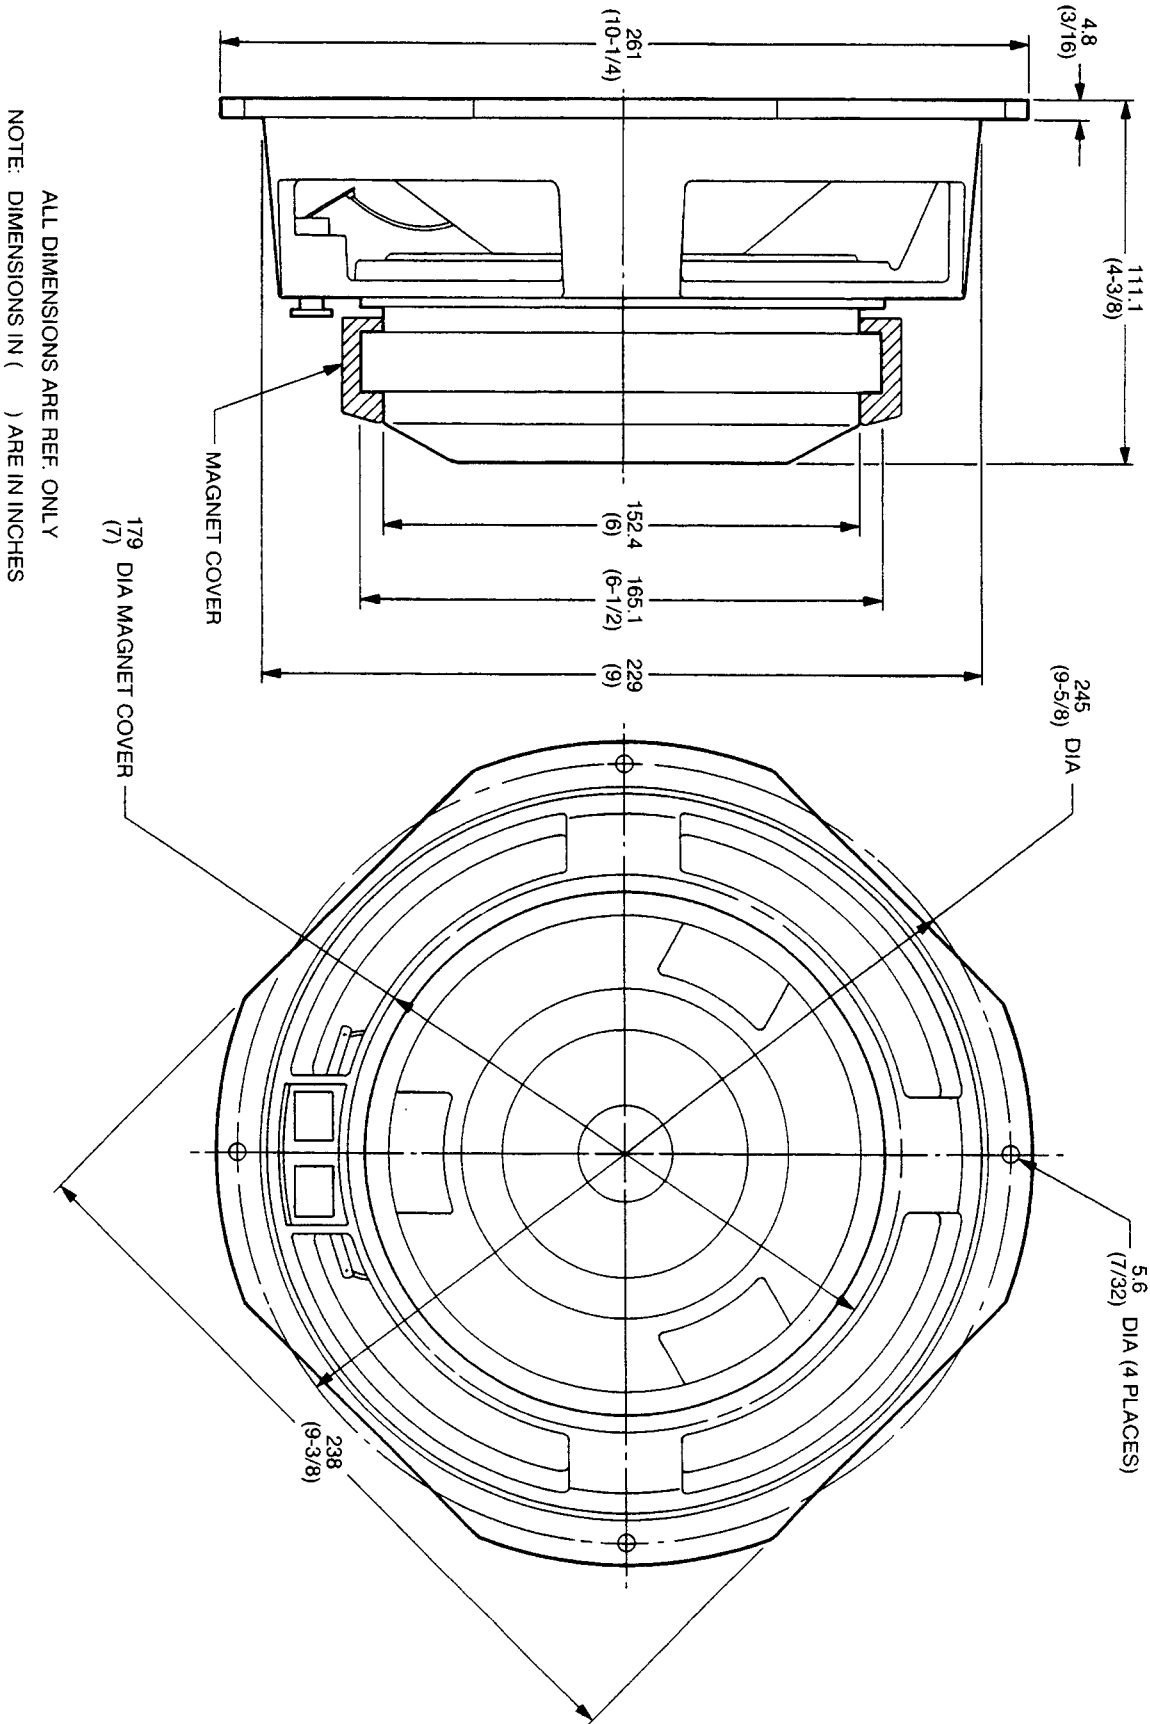

JBL2123H/J