

Technical Manual

JBL M151-8

SPECIFICATIONS



ACOUSTIC & ELECTRICAL SPECIFICATIONS:

- Nominal Impedance: 8 ohm
- Power Capacity: 300W AES Shaped Noise
- Frequency Range: 40 Hz to 5000 Hz (± 10 dB)
- Sensitivity: 102 dB SPL*
- Crossover Frequencies: N/A

SYSTEM COMPONENTS:

- Cabinet: N/A
- Grille: N/A
- Low Frequency Transducer: 380mm (15 in.) Cone Transducer (M151-8)
- DC Resistance: 4.8 ohm $\pm 10\%$ - Aluminum Wire

AURAL SWEEP TEST SPECIFICATIONS:

- A. L.F. Aural Sweep Test: 7.0V Input, 20 Hz to 1.2 kHz

PHYSICAL SPECIFICATIONS:


- Enclosure Dimensions: 387mm x 387mm x 167mm D (15.25 x 15.25 x 6.56 in. D)
- Shipping Weight: 16 lbs. (7.3 kg)

WARRANTY INFORMATION:


- Refer to the Warranty Statement packed with each product.

*1 Watt (2.83 V RMS) @ 1 Meter

PACKAGE

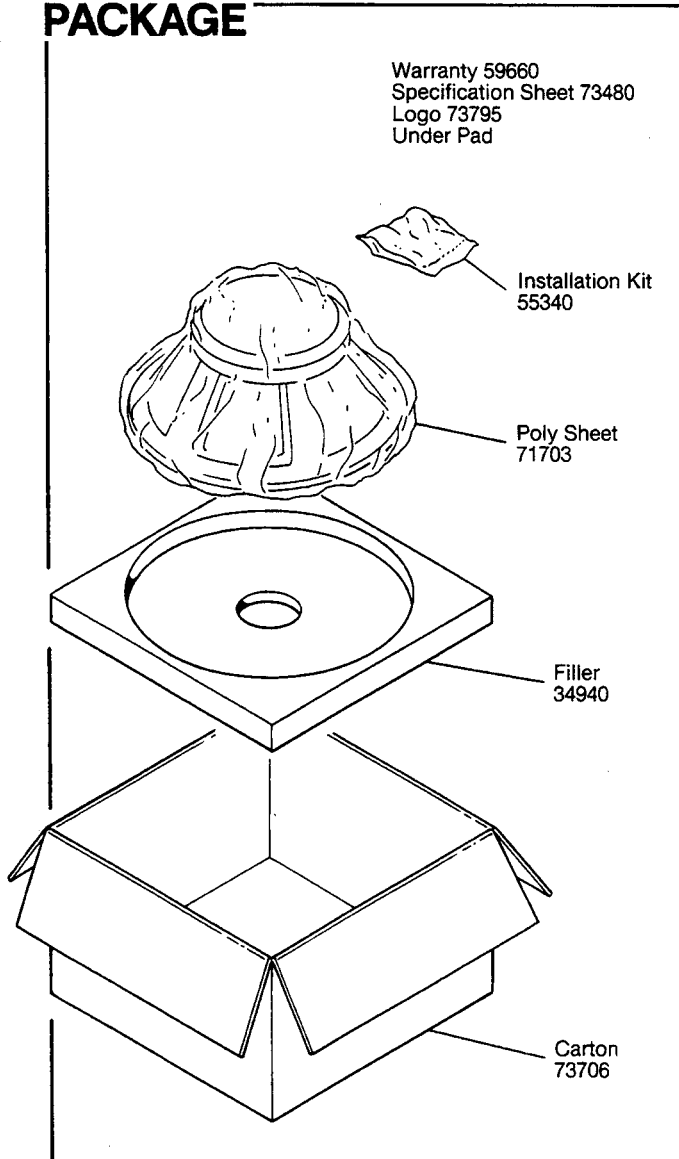

COMPONENT VIEW


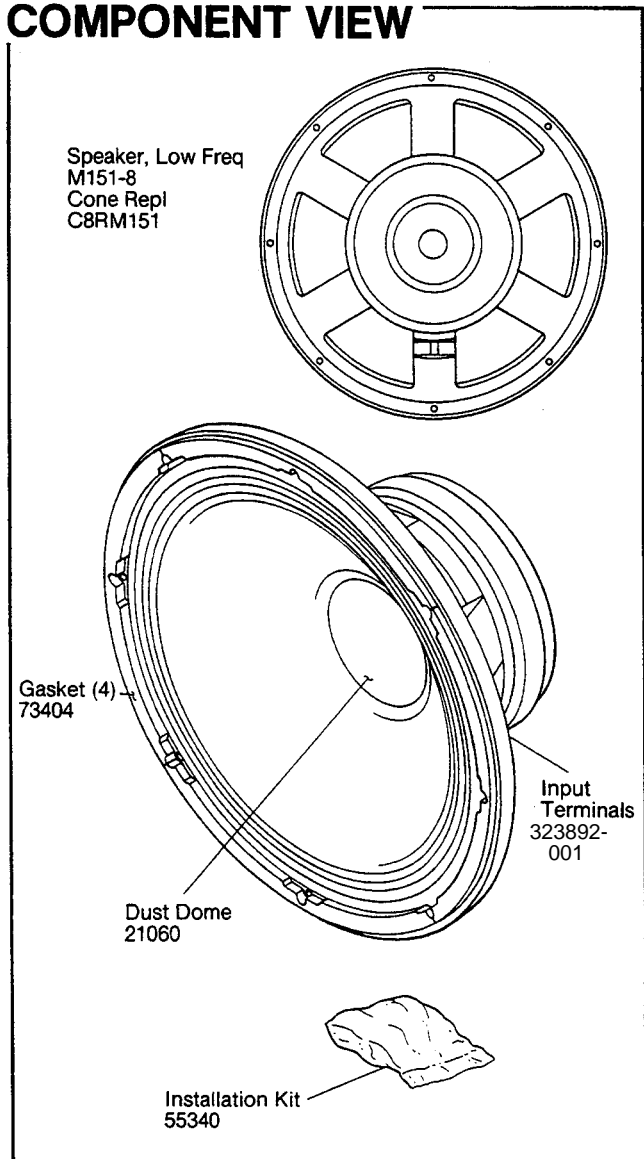


JBL M151-8 REV D

JBL M151-8

MECHANICAL DRAWING

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF JBL INC. AND SHALL NOT BE REPRODUCED, COPIED, OR USED AS THE BASIS FOR MANUFACTURE OR SALE OF APPLICABLES WITHOUT WRITTEN PERMISSION.

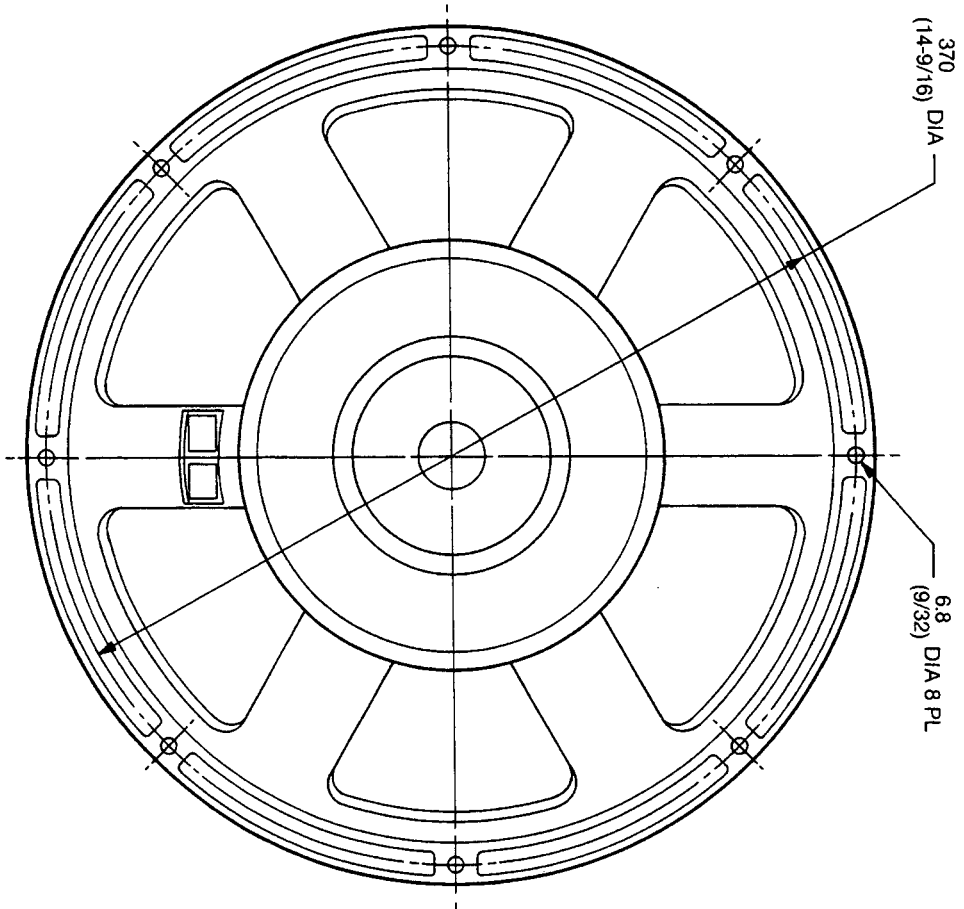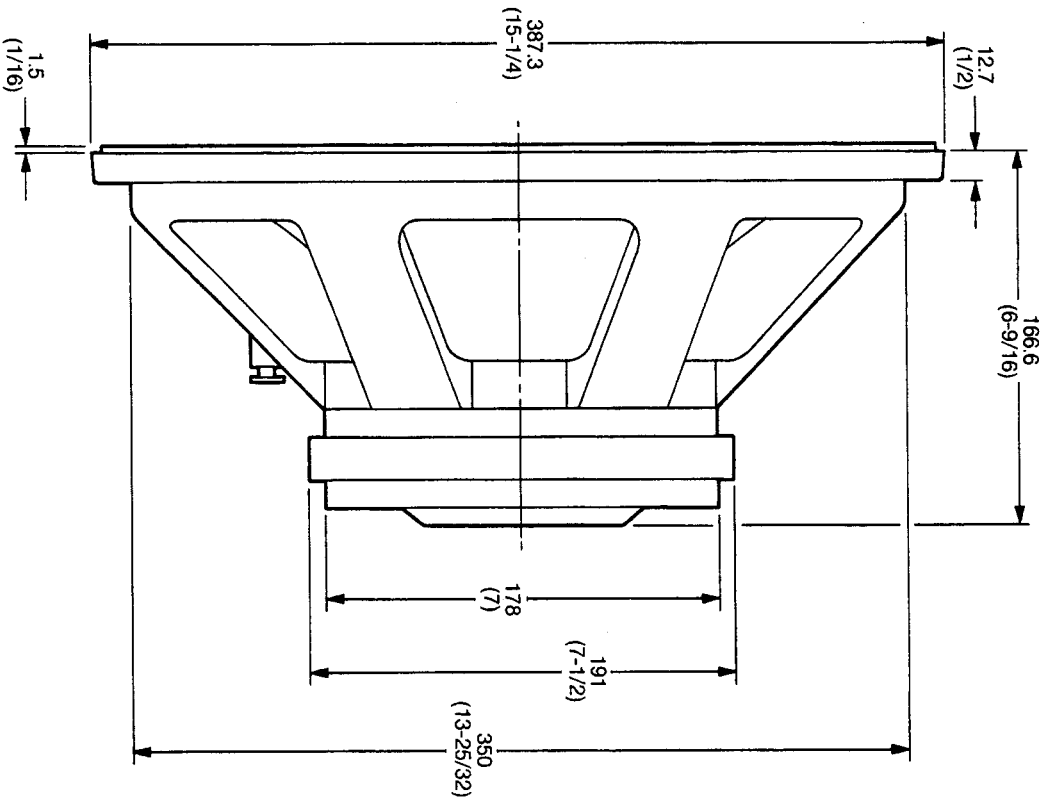

NOTE: DIMENSIONS IN () ARE INCHES

JBL M151-8