



Wiring Diagram EON15

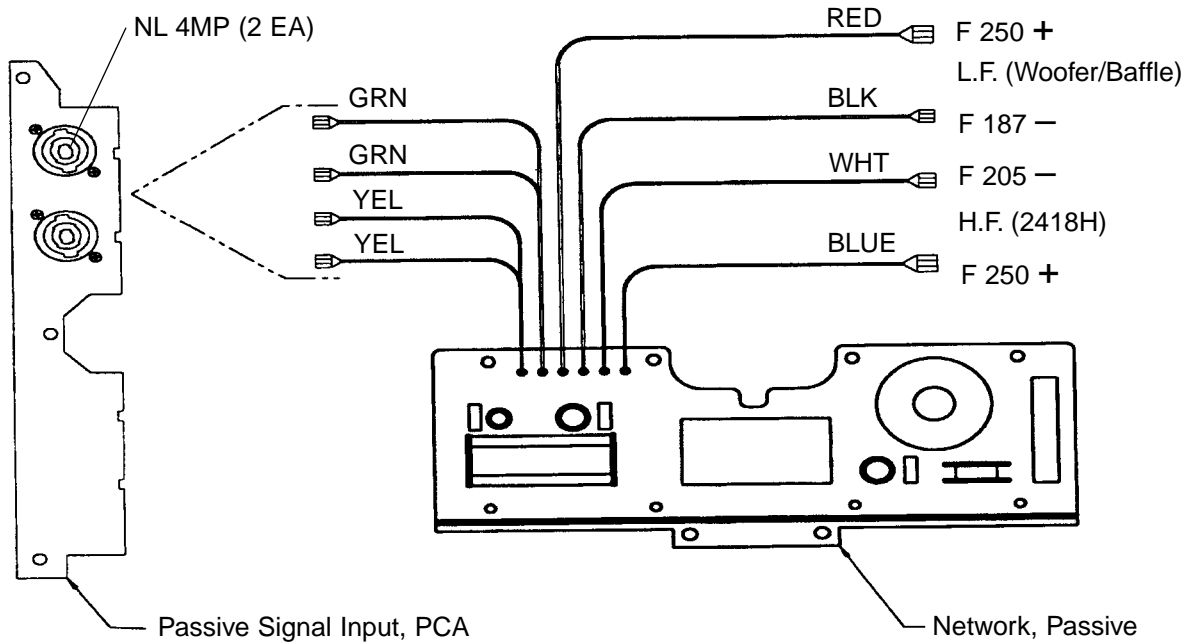

Network Schematic EON15

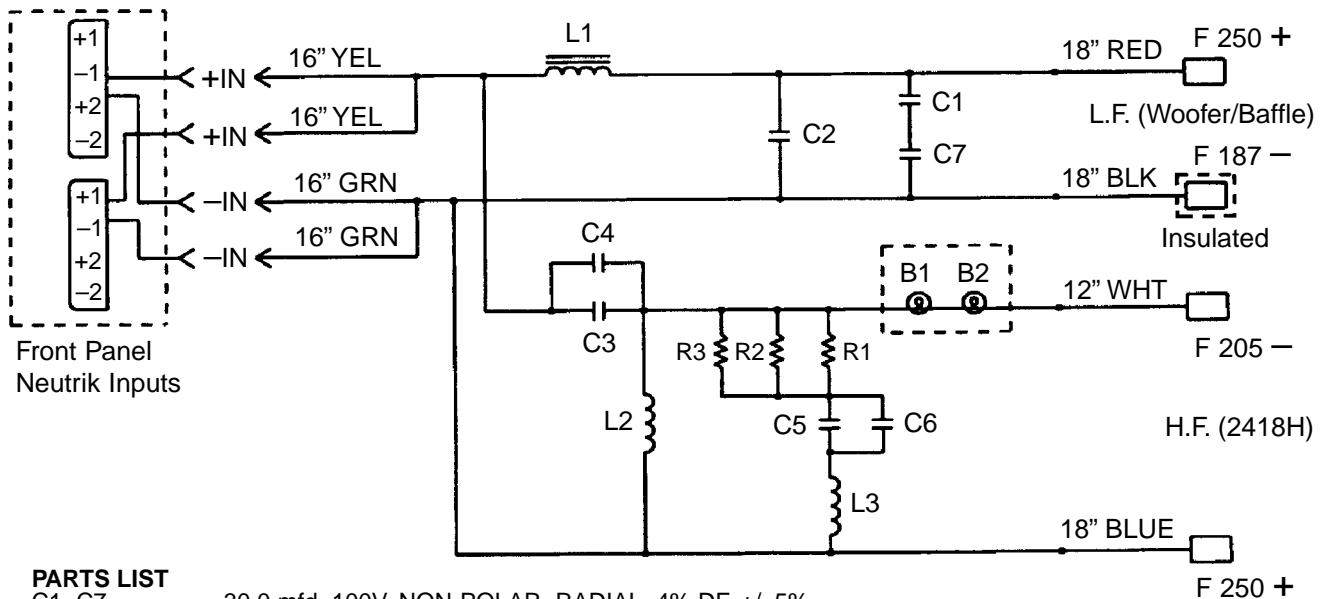

PARTS LIST

- C1, C7 30.0 mfd, 100V, NON-POLAR, RADIAL, 4% DF, +/-5%
- C2, C4, C6 0.01 mfd, 250V, CFP-99, M
- C3 4.0 mfd, 200V, METALLIZED POLYESTER FILM, FLAT AXIAL TYPE +/-5%, 45MM LG
- C5 2.2 mfd, 100V, NON-POLAR, RADIAL, 4% DF, +/-5%, 13 x 26mm CS
- L1 2.40 mH, 57 x 9.5 x 0.5mm, LAMINATED STEEL CORE, 0.33 ohm DCR, +/-5%, 18 AWG
- L2 0.40 mH, 42 x 15 x 14mm, AIR CORE, 0.40 ohm DCR, +/-5%, 20 AWG
- L3 0.20 mH, 25 x 12 x 12mm, AIR CORE, 0.40 ohm DCR, +/-5%, 22 AWG
- R1, R2, R3 23 ohm, 10W, +/-5%
- B1, B2 BULBS, SK-3
- 250 FASTON, FEMALE, .250 x 0.032, TINNED BRASS
- 205 FASTON, FEMALE, .205 x 0.020, BRASS
- 187 FASTON, FEMALE, .187 x 0.020, TINNED BRASS
- 187i FASTON, FEMALE, .187 x 0.032, TINNED BRASS, VINYL INSULATOR
- WIRES 16 AWG, UL-1015
- PCB MATERIAL: CEM-1 COPPER: 1oz.
- MICS ALUMINUM TUBE, 1.25 DIA, .032 MIN, THK, 2.25 LG
- NOTE: ALL COMPONENTS TO BE TESTED @ 1 kHz UNLESS OTHERWISE SPECIFIED**