


SPECIFICATIONS: NOTE ①

LOAD Z	LOW PASS	CROSS OVER	HIGH PASS	ATTENUATION
	600HZ	900HZ	1.5 KHZ	1.5 KHZ
16	LF -2	LF -7.5	LF -17	
	HF -16	HF -7.5	HF -5	HF -5,-7,-10

CIRCUIT:

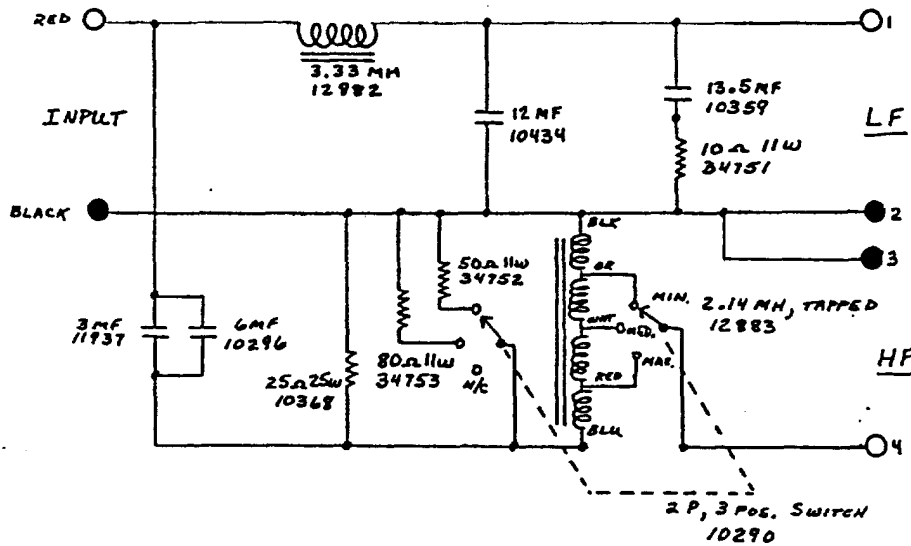

NOTES:


- ① USE STANDARD TEST FIXTURE

G	5-75
F	6-74

SPECIFICATIONS: NOTE ①

LOAD Z	LOW PASS	CROSS OVER	HIGH PASS	ATTENUATION
	1 KHZ		3 KHZ	3 KHZ
8	MF -4.5 HF -15.5		MF -1 HF -7	MF VAR HF VAR

CIRCUIT:

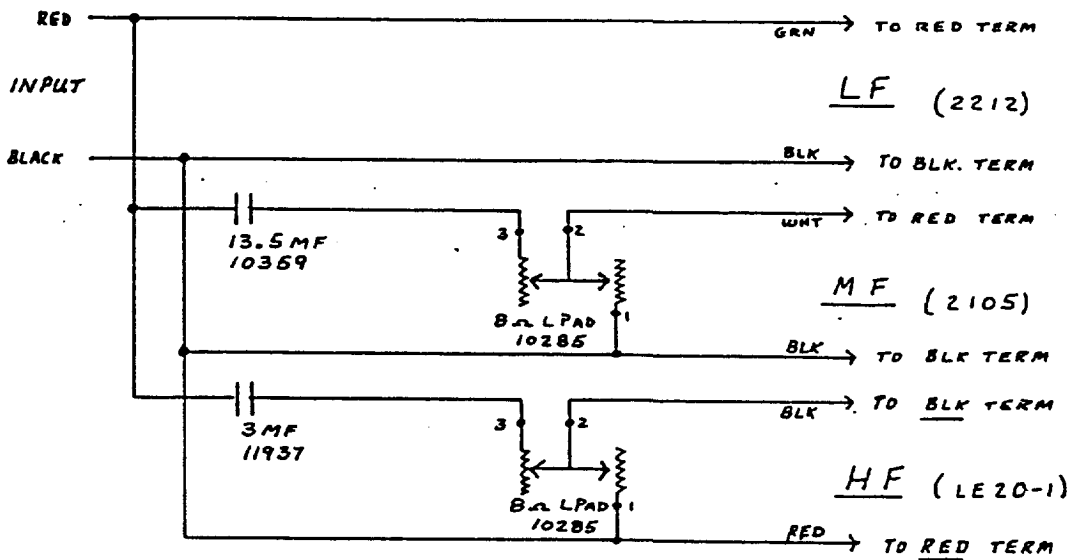

NOTES:

- ① USE STANDARD TEST FIXTURE