


SPECIFICATIONS: NOTE ①

LOAD Z	LOW PASS	CROSS OVER	HIGH PASS	ATTENUATION
16	300 HZ	500 HZ	900 HZ	900 HZ
	LF -1	LF -7.5	LF -20	
	HF -18	HF -7.5	HF -5	HF -5, -7, -10

CIRCUIT:

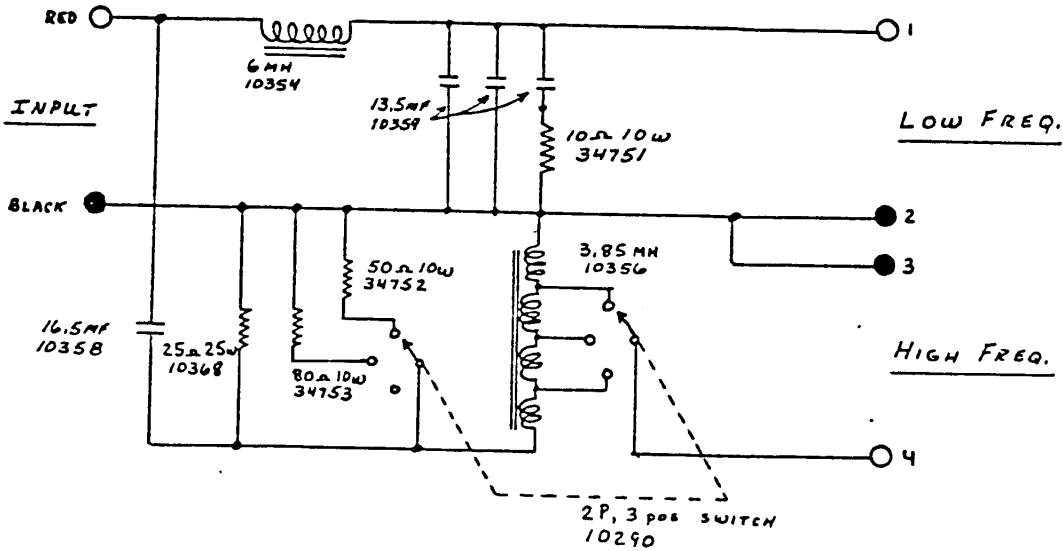

NOTES:

① USE STANDARD TEST FIXTURE

D	5-75
C	6-74